

Nomenclature: EXTERNALLY POWERED HI- LIFT CARGO TRAILER


Part Number MB-9515AH-EPU

CAGE: 4BRZ5

PART NUMBER:
MB-9515AH-EPU

**EXTERNALLY POWERED HI-LIFT
CARGO TRAILER**





Features:

- Trailers are self-contained with main powered hydraulic pump and separate manually operated hydraulic controls, all located at single control station on left side of trailer to adjust tilt, side to side and front to rear elevation and conveyer deck side shift.
- **Sync System** – Allows the lift cylinders to raise and lower together for level deck raising and lowering, in addition to
- **Tires** - Solid Resilient Tires: Higher load capacity / Minimal Maintenance / Puncture free technology
- **Parking Brake** – Hydraulically operated with parking brake lock lever and quick release from control station.
- **Side shifting top roller conveyor deck** – Hydraulically operated lateral side shift in each direction. Hydraulic control is located at control station on left side of trailer. Deck can be locked in the centered position for transport.
- **Hand Operated Winch** – Fold Down or removable. Located at center of trailer


**PART NUMBER:
MB-9515AH-EPU**

EXTERNALLY POWERED HI-LIFT CARGO TRAILER

This trailer, constructed in America with domestically sourced assemblies and products, is utilized by both commercial and military clients for transporting dunnage and palletized materials weighing up to 12,000 lbs.


frame with fold-out operator handle at control station on left side of trailer. 35' useable synthetic line with breaking strength of 21,700

- **Restraints** – The trailer has pallet restraints & D-Rings for tie down, located on each side of the trailer.
- **Pintle hook** at rear for connecting multiple trailers for movement by one tow vehicle. - Mounted on the center rear of the frame.

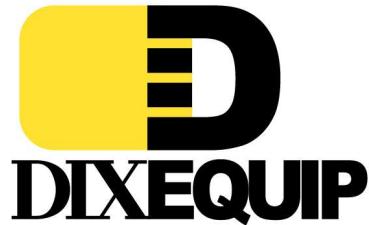


Leading Specifications:


- Shipboard safe working load = 7,500 lbs.
- Shore-based safe working load = 10,300 lbs.
- Munitions safe working load = 10,300 lbs.
- Net Operating Weight = 3460. Lbs. Approx.
- Conveyor Deck Side-Shift = 2 Inches each direction from centered position.
- Overall Length = 150 Inches/with tow bar in upright or stored position.
- Overall Width = 63.15/16 Inches
- Overall Deck Height Lowered = 26.50 Inches
- Overall Deck Height Raised = 45.25 Inches
- Tow Bar = 57 Inches Long, 68 Inches tall in upright position. Removable and stores securely under main frame from front of Trailer. Includes a 3 Inch diameter ring for pintle hitch connection.

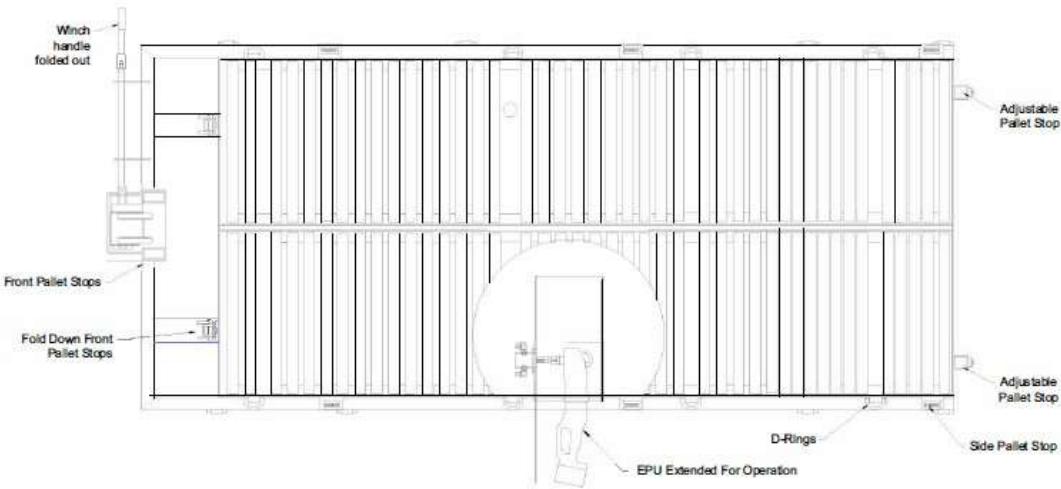


Top Elevation: EPU Extended For Operation

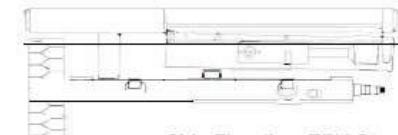


Side Elevation: EPU Stored

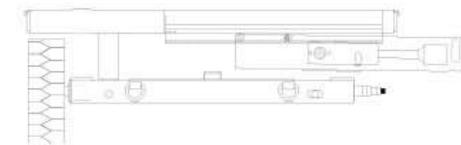

Side Elevation: EPU Extended For Operation

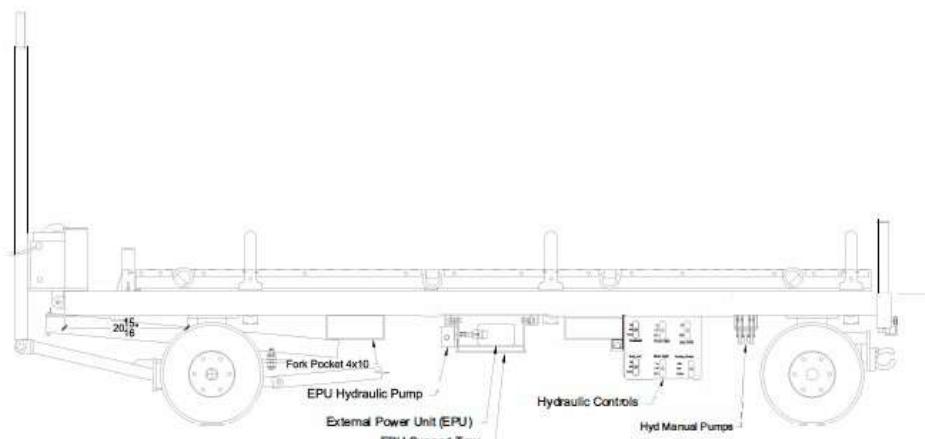

Side Elevation

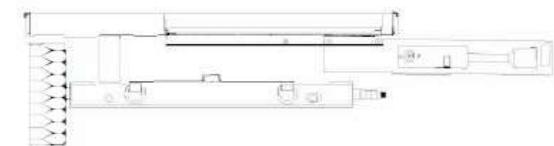

Side Elevation: EPU Extended For Removal


P.O. Box 153055
DIXEQUIP Lufkin, Tx 75915

Part Description: Date: 7/3/2025
 Profile: External Power Unit (EPU)



Crop







